

Talon RTR 2729A

3.6 GS/sec RF/IF
rugged portable recorder

Portability and performance in a compact recorder

- Can operate as a single-channel 3.6 GHz recorder or a two-channel 1.8 GHz recorder
- Real-time sustained recording rates of up to 4.8 GB/sec
- Up to of 122 TB of SSD storage



The Talon® RTR 2729A is a turnkey system that allows users to record very high-bandwidth signals in a lightweight and rugged portable package. Equipped with a 3.6 GHz 12-bit A/D converter and user-programmable DDC (digital downconverter), the RTR 2729A is capable of capturing RF/IF signals with bandwidths as high as 360 MHz continuously for more than four hours.


The RTR 2729A is supplied in a small-footprint portable package measuring only 16.9 inches wide, 9.5 inches deep, and 13.4 inches high, and weighing just less than 30 pounds. With measurements similar to a small briefcase, this portable workstation includes an Intel Core i7 processor, a high-resolution 17-inch LCD monitor and up to 122 TB of SSD storage.

The RTR 2729A uses a high-powered Mercury Virtex-7-based Onyx® board that includes a PCIe Gen. 3 engine to provide data streaming for the high-speed A/D converter. Coupled with a high-performance PCIe Gen. 3 SATA III RAID controller, the RTR 2729A is capable of streaming contiguous data to disk in real-time at rates up to 4.8 GB/sec.

The RTR 2729A can operate as a single-channel 3.6 GHz or a two-channel 1.8 GHz recorder. The channel mode operation, sample rate, DDC settings, packing modes and trigger settings are controllable via the built-in SystemFlow GUI (Graphical User Interface). An optional GPS receiver and timing card can be added to the system to provide precise time and position stamping of the recorded data.

FEATURES

- Designed to operate under conditions of shock and vibration
- Portable system: 16" W x 6.9" D x 13" H
- Lightweight: just less than 30 pounds
- Sample rates up to 3.6 GHz in single-channel mode
- Sample rates up to 1.8 GHz in dual-channel mode
- 12-bit A/D, with 16- and 8-bit packing modes
- Capable of recording RF/IF frequencies to 1.75 GHz in single-channel mode
- Capable of recording RF/IF frequencies to 2.8 GHz in dual-channel mode
- Real-time sustained recording rates of up to 4.8 GB/sec
- Windows® workstation with high-performance Intel® processor
- Up to 122 terabytes of SSD storage to NTFS RAID solid state disk array
- SystemFlow® GUI with signal viewer analysis tool
- File headers include time stamping and recording parameters
- Optional GPS time and position stamping
- Optional 18–36 VDC power supply

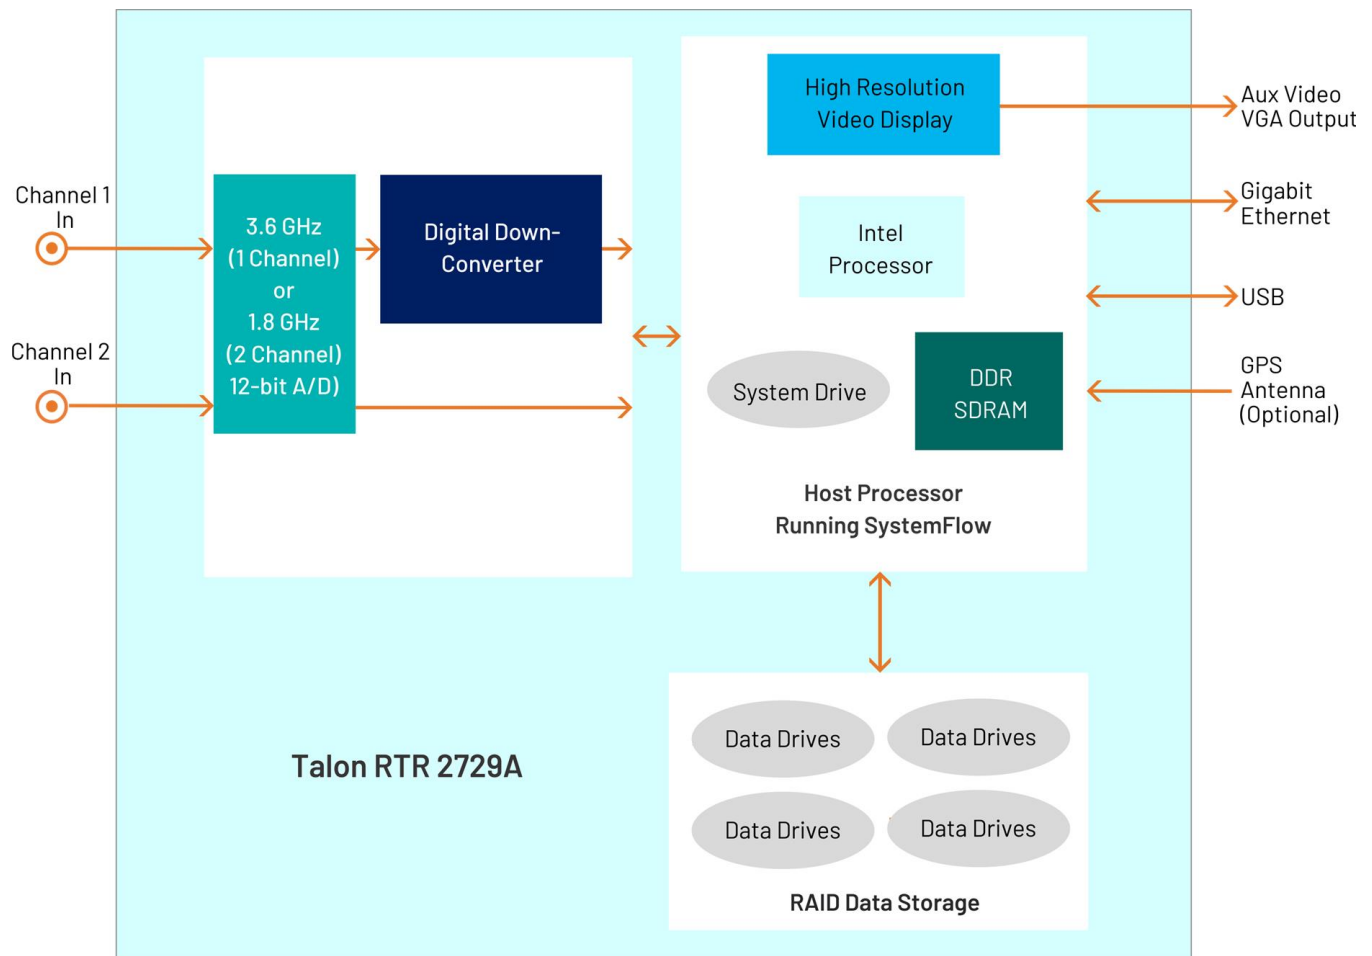

RUGGED CHASSIS WITH SSD STORAGE

The RTR 2729A is configured with hot-swappable SSDs, front panel USB ports, and I/O connectors on the side panel. It is built in an extremely rugged steel and aluminum chassis and is tested for shock and vibration. The SSDs provide storage capacities of up to 30.7 TB. Drives can be easily removed or exchanged during or after a mission to retrieve recorded data. Multiple RAID levels, including provide a choice for the required level of redundancy.

SYSTEMFLOW SOFTWARE

All Talon recorders include the Mercury SystemFlow[®] recording software. SystemFlow software enables users to configure and control a Talon recorder:

- The SystemFlow GUI provides a point-and-click user interface. It includes Configure, Record, Playback, and Status screens, each with intuitive controls and indicators. The user can easily move between screens to configure parameters, control and monitor a recording, and play back a recorded stream.
- SystemFlow API provides a set of C-callable libraries that allow engineers to develop their own user interface to configure and control their Talon recorder. Additional high-level libraries, like Python, are available upon request.

The SystemFlow GUI and API can be run from a remote connection over Gigabit Ethernet. Recorders can be set up to run autonomously by implementing scripts using the API interface.

Talon systems record all data to the native NTFS file system, allowing for quick and easy access to the data from any computer. A simple header that holds the recording parameters is added to the beginning of each file. An optional GPS receiver allows the user to precisely timestamp files and optionally track the recorder's position throughout a mission.

SYSTEMFLOW SIMULATOR

To learn more about SystemFlow software, contact Mercury at techsales@mrcy.com. The SystemFlow Simulator allows you to learn how to use a Talon recorder's SystemFlow software interface before you acquire a recorder or while you are waiting for delivery of a recorder.

The Simulator can simulate the operating environment of all the different Talon recorder models. The Simulator also demonstrates the SystemFlow Signal Viewer by playing recorded signals to simulate the appearance of live signals being digitized and recorded by a Talon analog signal recorder.

Features

- Provides real-time recording system simulation
- Allows engineers to write and test their application (built using the SystemFlow API) before receiving the recorder hardware
- Demonstrates SystemFlow signal and file viewer tool
- Capable of simulating all Talon analog and digital recording systems
- Full Talon SystemFlow GUI
- Simulator can be used to develop Talon system profiles for use in the final system

Talon RTR 2729A

SYSTEMFLOW RECORDER INTERFACE

The RTR 2729A GUI provides the user with a control interface for the recording system. It includes Configuration, Record, Playback, and Status screens, each with intuitive controls and indicators. The user can easily move between screens to set

configuration parameters, control and monitor a recording, play back a recorded signal, and monitor board temperature and voltage levels. The Signal Viewer, integrated into the recording GUI, allows the user to monitor real-time signals or signals recorded on disk.

The screenshot displays the GUI for the Talon RTR 2729A, titled "Ultra Wideband RF/IF Recorder". At the top, there are navigation tabs: "Configure", "Record", "Play", "Status", and "About".

The main interface is divided into two primary sections:

- Profile Configuration:** Includes "Load Profile" and "Save Profile" buttons.
- Remote Server Configuration:** Includes fields for "Server Name" (with a dropdown arrow), "DNS Name/IP Address", and a "Connect" button.

Below these sections is a "Local" tab with a sub-tab "78640_0". This section displays "Model 78741" and a table of channel parameters and board status.

Channel	Channel Parameters	Board Status
CH 1 IN	Configure	Temperature: 67 °C
CH 2 IN	Configure	+12V: 12.14 V
		+3.3V: 3.23 V
		+2.5V: 2.47 V
		+1.8V: 1.82 V
		+1.5V: 1.49 V
		Clock: Configure

To the right of the configuration panels is a detailed block diagram of the Talon RTR 2729A hardware architecture. It shows:

- Inputs:** Channel 1 In and Channel 2 In.
- Processing:** A 3.6 GHz (1 Channel) or 1.8 GHz (2 Channel) 12-bit A/D converter feeds into a Digital Down-Converter.
- System Core:** An Intel Processor, System Drive, and DDR SDRAM are connected to a Host Processor Running SystemFlow.
- Outputs:** High Resolution Video Display, Aux Video VGA Output, Gigabit Ethernet, USB, and GPS Antenna (Optional).
- Storage:** RAID Data Storage consisting of four Data Drives.

SYSTEMFLOW HARDWARE CONFIGURATION INTERFACE

The RTR 2729A Configure screens provide a simple and intuitive means for setting up the system parameters. The configuration screen, shown below, allows user entries for input source,

sampling frequency, and gate and trigger information. All parameters contain limit-checking and integrated help.

The screenshot shows a configuration window titled "Channel 1 Input Parameters" with a light olive green background. It contains several settings:


- Bandwidth:** A radio button is selected, with a text box containing "1000.0" and a dropdown menu set to "MHz".
- Decimation:** A radio button is unselected, with a text box containing "1".
- Downconversion:** A checkbox is unselected.
- Input Source:** A dropdown menu is set to "ADC 1".
- Center Frequency:** A text box contains "0.0" followed by "MHz".
- Gate / Trigger Mode:** A dropdown menu is set to "None".
- Gate / Trigger Polarity:** A dropdown menu is set to "Negative".
- Sync Source:** A dropdown menu is set to "Internal".
- Pulsed Radar:** A section header.
- Trigger Length:** A text box contains "0" followed by "Samples".
- A/D Sampling Rate:** A text box contains "2000.0" followed by "MHz".
- Disk Data Rate:** A text box contains "2000.0" followed by "MS/s".

At the bottom of the window are three buttons: "OK", "Cancel", and "Apply".

SIGNAL VIEWER

The SystemFlow Signal Viewer includes a spectrogram, virtual oscilloscope, and spectrum analyzer for signal monitoring in both the time and frequency domains. It is extremely useful for previewing live inputs prior to recording, and for monitoring signals as they are being recorded to help ensure successful recording sessions. The viewer can also be used to inspect and analyze the recorded files after the recording is complete.

Advanced signal analysis capabilities include automatic calculators for signal amplitude and frequency, second and third harmonic components, THD (total harmonic distortion), and SINAD (signal to noise and distortion). With time and frequency zoom, panning modes, and dual, annotated cursors to mark and measure points of interest, the SystemFlow Signal Viewer can often eliminate the need for a separate oscilloscope or spectrum analyzer in the field.

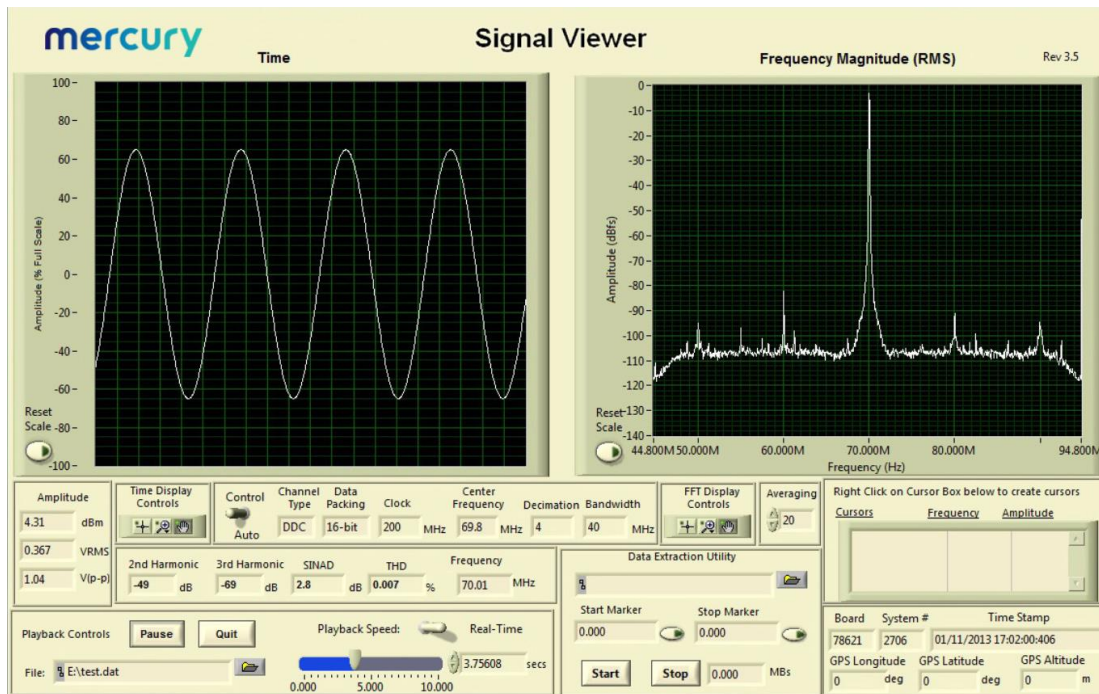

SYSTEMFLOW API

SystemFlow includes a complete API (Application Programming Interface) supporting control and status queries of all operations of the Talon recorder from a custom application.

High-level C-language function calls and the supporting device drivers allow users to incorporate the RTR 2729A as a high-performance server front end to a larger system. This is

supported using a socket interface through the Ethernet port, either to a local host or through an internet link for remote, standalone acquisition. Recorded NTFS files can be easily retrieved through the same connection. In addition to C, support is also provided for high level languages such as Python and C#. Below is an example of controlling recording via the SystemFlow API.

```
728     }
729     //transfer until end of disk
730     else if (transferType == TRANSFER_END_OF_DISK)
731     {
732         recordParams->transferTime = 0;           // must set to 0
733         recordParams->transferLength = 0;        // must set to 0
734     }
735
736     //////////////////////////////////////////////////////////////////// Start the record ////////////////////////////////////////////////////////////////////
737     SetConsoleTextAttribute (hConsole, FOREGROUND_GREEN | FOREGROUND_INTENSITY );
738     printf("\nCase 6: RTS_Record\n");
739     SetConsoleTextAttribute (hConsole, wOldColorAttrs);
740
741     //trigger immediately
742     if(recordParams->trigger == RTS_TRIGGER_IMMEDIATELY)
743     {
744         //send record command
745         if ((error = RTS_Record(++msgNum,
746                               serverInfo,
747                               recordParams,
748                               recordChanId,
749                               fileName[0])) != RTS_SUCCESS)
750         {
751             printf("Record Error # 0x%lx.\n", error);
752             exitHandler(error);
753             goto freeMem;
754         }
755
756         Sleep(500);
757     }
758
759     //wait for SW trigger
760     else if(recordParams->trigger == RTS_WAIT_FOR_SW_TRIGGER)
761     {
762         //send record command which set up record and start DMA
763         if ((error = RTS_Record(++msgNum,
764                               serverInfo,
765                               recordParams,
766                               recordChanId,
767                               fileName[0])) != RTS_SUCCESS)
```

SPECIFICATIONS

PC Workstation

- Operating System: Windows®
- Processor: Intel Core i7 processor or better
- Operating System Drive: 128 GB SSD
- Monitor: Built-in 17.3" high-resolution LCD, 1920 x 1080 pixels, 16:9 aspect ratio, anti-glare surface Brightness: 300 cd/m2; Contrast ratio: 400:1 typical
- SDRAM: (standard) 8 GB
 - Option -309: 16 GB
 - Option -310: 32 GB
 - Option -311: 64 GB
- RAID
 - Option -285: RAID 5
 - Option -286: RAID 6

Analog Signal Inputs

- Connectors: Two side panel SSMC connectors, IN 1 & IN 2
- Input Type: Single-ended, non-inverting
- Full Scale Input: +4 dBm into 50 ohms
- Coupling: Transformer-coupled
- Input Transformers
- Bandwidth: 4.5 kHz to 3.0 GHz

A/D Converters

- Type: Texas Instruments ADC12D1800
- Sampling Rate:
 - Single-channel mode: 500 MHz to 3.6 GHz
 - Dual-channel mode: 150 MHz to 1.8 GHz
- Resolution: 12 bits
- Maximum Usable Input Frequency
 - Single-channel mode: 1.75 GHz

- Dual-channel mode: 2.8 GHz
- Anti-Aliasing Filters: External, user-supplied

Digital Downconverters

- Modes: One or two channels, programmable
- Supported Sample Rate (f_s):
 - One-channel mode: 3.6 GHz
 - Two-channel mode: 1.8 GHz
- Decimation Range (D):
 - One-channel mode: 8x, 16x, 32x, bypass
 - Two-channel mode: 4x, 8x, 16x, bypass
- Usable Output Bandwidth: $0.8 * f_s / D$

Sampling Clock Source

Internal fixed-frequency or programmable oscillator (selectable by option); in single-channel mode, the sample rate is 2x the clock frequency; in dual-channel mode, the sample rate equals the clock frequency

Frequency Reference

Accepts external 10 MHz reference at 0 to +4 dBm to phase-lock the clock oscillator

Optional DC Power supply

- Voltage: 18 to 36 VDC
- Input Current: 42 to 26 A (39 A at 24 VDC)
- Inrush Current: 100 A at 24 VDC
- Temperature Range: Oper.: 0° to 50° C, Store: -0° to 80° C
- Efficiency: >80% typical at 24 V full load
- Power Good Signal: On delay 100 to 500 msec
- OverPower Protection: 110% to 160%
- Remote Control: On/Off
- Safety: Meets UL, TUV, CB specifications

Physical and Environmental

- Size: 16.0" W x 6.9" D x 13.0" H
- Weight: 30 lb maximum
- Operating Temp: 0° to +50° C

- Storage Temp: -40° to +85° C
- Relative Humidity: 5 to 95%, non-condensing
- Operating Shock: 30 g max. (11 msec, half sine wave)
- Operating Vibration: 10 to 20 Hz: 0.02 inch peak, 20 to 500 Hz: 1.4 g peak acceleration
- Non-operating Vibration: 5 to 500 Hz: 2.06g RMS
- Power Requirements: 100 to 240 VAC, 50 to 60 Hz, 500 W max.

ORDERING INFORMATION

General Options (append to all options)

Option - 261	GPS time and position stamping
Option - 264	IRIG-B time stamping
Option - 625	Removable operating system drive

RAID Configurations

Standard	RAID 0 configuration
Option - 285	RAID 5 configuration
Option - 286	RAID 6 configuration

Memory Options

Standard	8 GB system memory
Option - 309	16 GB system memory
Option - 310	32 GB system memory
Option - 311	64 GB system memory

Sample Clock Options	
Option -910	<p>User-Programmable Sample Clock</p> <p>Dual-channel mode sample clock range</p> <p>150 MHz – 945 MHz</p> <p>970 MHz – 1134 MHz</p> <p>1213 MHz – 1417.5 MHz</p> <p>Single-channel mode sample clock range</p> <p>500 MHz – 1890 MHz</p> <p>1940 MHz – 2268 MHz</p> <p>2426 MHz – 2835 MHz</p>
Option -911	<p>Fixed-Frequency Clock: 1.5 / 3.0 GHz sample clock</p>
Option -912	<p>Fixed-Frequency Clock: 1.6 / 3.2 GHz sample clock</p>
Option -915	<p>Fixed-Frequency Clock: 1.8 / 3.6 GHz sample clock</p>
<p>Sample rates are set up for dual-channel mode first and single-channel mode second: e.g., 1.5 / 3.0 is 1.5 in dual-channel mode and 3.0 in single-channel mode. Custom fixed-frequency sample clocks available upon request.</p>	

Storage Options	
Option -415	7.6 TB SSD storage capacity
Option -420	15.3 TB SSD storage capacity
Option -430	30.7 TB SSD storage capacity
Option -460	61.4 TB SSD storage capacity
Option -485	122.8 TB SSD storage capacity

Contact Mercury for compatible option combinations. Storage and general options may change, so contact Mercury for the latest information.

LIFETIME SUPPORT FOR TALON PRODUCTS

Mercury offers worldwide customers shorter development time, reliable, rugged solutions for a variety of environments, reduced costs, and mature software development tools. We offer free lifetime support from our engineering staff, which customers can depend on through phone and email, as well as software updates. Take advantage of our 40 years of experience in delivering high-performance radar, communications, SIGINT, EW, and data acquisition MIL-Aero solutions worldwide.



Corporate Headquarters

50 Minuteman Road
 Andover, MA 01810 USA
+1 978.967.1401 tel
+1 866.627.6951 tel
+1 978.256.3599 fax

International Headquarters

Mercury International
 Avenue Eugène-Lance, 38
 PO Box 584
 CH-1212 Grand-Lancy 1
 Geneva, Switzerland
+41 22 884 5100 tel

Learn more

Visit: mrcy.com/go/MP2729A

For technical details, contact:
mrcy.com/go/CF2729A



The Mercury Systems logo and the following are trademarks or registered trademarks of Mercury Systems, Inc.: Mercury Systems, Innovation That Matters, SystemFlow, and Talon. Other marks used herein may be trademarks or registered trademarks of their respective holders. Mercury believes this information is accurate as of its publication date and is not responsible for any inadvertent errors. The information contained herein is subject to change without notice.

