

RRT-3UVPX-NVMe-R-A

3U VPX Air Cooled Carrier with Removable NVMe SSD Module

The 3U VPX Air Cooled carrier with removable NVMe SSD module is for applications that require the frequent removal of SSD, fast transfer rates and large capacities. It consists of two components; the 3U VPX carrier board with PCI express (PCIe) interface to VPX backplane that mounts in one slot of 3U VPX chassis and the removable NVMe SSD module. The connectors between the drive module and the carrier are rated for 100,000 mating cycles to support frequent insertions and removals.





The NVMe SSD module can use any COTS U.2 NVMe Solid State Drive (SSD) providing capacities up to 16TB and transfer rates of up to 3940 MB/S. Options for TCG opal and military erase

FEATURES

- Capacities up to 16 TB
- 3940 MB/S Transfer rates
- Removable SSD module
- PCIe Gen 3 x 4 interface
- 100,000 mating cycles
- OpenVPX Fat Pipe (FP) MOD-3-PER-1F-16.3.2.1 or 2
- VITA 46, 47, 48, 65
- Boot and/or storage disk
- Air cooled
- COTS U.2 NVMe SSDs
- Military erase options
- FIPS197, TCG Opal options
- Rugged design
- VxWorks™, Linux and Windows™ support



**EASILY REMOVE SSD DRIVE
MODULE FROM VPX BOARD**

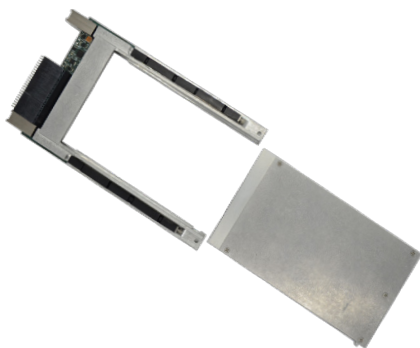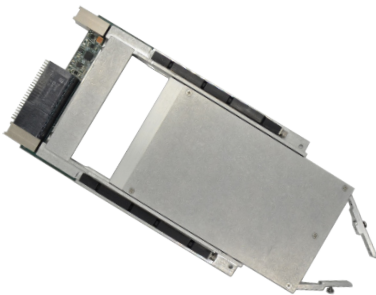

3U VPX Air Cooled Carrier with PCIe Interface

RRT-3UVPX-NVMe-R-A100-□-□

OPTIONS (MAY BE LEFT BLANK)	
CONFORMAL COATING	
UR	POLYURETHANE
AR	ACRYLIC
EXTENDED TEMP. RANGE	
X	-40° C to 85° C

EXAMPLES:

RRT-3UVPX-NVMe-R-A100-UR-X
RRT-3UVPX-NVMe-R-A100

Removable NVMe SSD Drive Module

RRT-DM-NVME-R-□-□-□-□-□-□

REQUIREMENTS	
NAND FLASH TYPE	
pSLC	PSUEDO SINGLE LEVEL CELL
MLC	MULTI LEVEL CELL
TLC	TRI LEVEL CELL (3D)
CAPACITY	
CAPACITIES UP TO 16 TB	
OPTIONS (MAY BE LEFT BLANK)	
CONFORMAL COATING	
UR	POLYURETHANE
AR	ACRYLIC
EXTENDED TEMP. RANGE	
X	-40° C to 85° C
NO TOOLS	
TS	THUMB SCREWS
SECURITY	
FE	FAST ERASE
SE1	NSA/CSS MANUAL 9-12 ERASE
SE2	RCC-TG IRIG 106-107 CHAPTER 10 ERASE
OPAL	TCG OPAL COMPLIANT
FIPS197	FIPS197 COMPLIANT

EXAMPLES:

RRT-DM-NVMe-TLC-16TB
RRT-DM-NVMe-pSLC-1TB-UR-X-SE1
RRT-DM-NVMe-MLC-8TB-UR-X



3U VPX Air Cooled Carrier with Removable NVMe SSD Module

PERFORMANCE			
NAND FLASH TYPE	TLC	MLC-X	pSLC-X
CAPACITIES ¹	UP TO 16TB	UP TO 8TB	UP TO 4TB
INTERFACE ²	PCIe GEN 3 X 4	PCIe GEN 2 x 4	PCIe GEN 2 x 4
THROUGHPUT	3940 MB/S	800 MB/S	1000 MB/S
RELIABILITY			
MTBF-DRIVE	1 MILLION HOURS	1 MILLION HOURS	2 MILLION HOURS
MTBF-VPX BOARD ⁶	3 MILLION HOURS	3 MILLION HOURS	3 MILLION HOURS
DATA RETENTION	1 YEAR	1 YEAR	5 YEARS
ENDURANCE (100GB) TOTAL BYTES WRITTEN	70TBW	70 TBW	250TBW
ENDURANCE RATING ⁷	5 YEARS		
CARRIER/DRIVE MODULE MATING CYCLES	100,000 CYCLES		
POWER			
VOLTAGE	12V +/- 5%, +5V +/- 5%, +3.3V +/- 5%		
WATTS (IDLE)	7 W	1.5 W	1.5 W
WATTS (ACTIVE)	20 W	10 W	10 W
ENVIRONMENTAL			
OPERATING TEMP., VITA 47 CLASS ³	0 to 60C, AC1	-40 to 85C, AC3	0 TO 60C, AC1 -40 to 85C, AC3
STORAGE TEMP.	-40°C to 85°C	-40°C to 85°C	-40°C to 85°C
ALTITUDE	80,000 FT (24,000 MTRS)	80,000 FT (24,000 MTRS)	80,000 FT (24,000 MTRS)
RELATIVE HUMIDITY	5% TO 95%	5% TO 95%	5% TO 95%
SHOCK, VITA 47 CLASS ⁴	40 g 11 MILLISECOND HALF-SINE, OS2	40 g 11 MILLISECOND HALF-SINE, OS2	40 g 11 MILLISECOND HALF-SINE, OS2
VIBRATION, VITA 47 CLASS ⁵	0.1 g ² /HZ100 HZ TO 1000 HZ, V3	0.1 g ² /HZ100 HZ TO 1000 HZ, V3	0.1 g ² /HZ100 HZ TO 1000 HZ, V3
PHYSICAL			
FORM FACTOR	3U VPX		
WEIGHT	14 OZ MAX		
NOTES			
<p>(1) Larger capacities available as new COTS U.2 NVMe drives released</p> <p>(2) Interface connected via compatible slot profile MOD-3-PER-1T-16.3.3.1 or 2</p> <p>(3) Thermal qualification per MIL-STD-810F, Method 501 Procedure II, and MIL-STD-810F, Method 502, Procedure II</p> <p>(4) Shock qualification per MIL-STD-810F, Method 516, Procedure I</p> <p>(5) Vibration qualification per MIL-STD-810F, Method 514, Procedure I</p> <p>(6) Telcordia SR-332, issue 3, operating temp (40C), electrical stress (50%), environmental factor (1.0)</p> <p>(7) Based on JESD218 standard with 4KB random write workload</p>			

Red Rock Technologies, Inc. reserves the right to modify, change or discontinue specific products within its product line at its own discretion. Red Rock Technologies, Inc. does not assume any liability resulting from the application or use of its products. The information contained herein has been checked and is believed to be entirely accurate, however, no responsibility is assumed for inaccuracies.

"Red Rock Technologies" and the mountain logo are registered trademarks of Red Rock Technologies, Inc.
© Copyright 2020 Red Rock Technologies, Inc.
All rights reserved. (Rev. 20200626a)