





# RRT-6UVPX-NVMe-R-A

## 6U VPX Air Cooled Carrier with PCIe Interface and Removable NVMe SSD Modules

6U VPX AIR COOLED CARRIER WITH PCIe INTERFACE AND REMOVABLE NVMe SSD MODULES is for applications that require the frequent removal of SSD, fast transfer rates and large capacities. It consists of two components: the 6U VPX carrier board with PCI express (PCIe) interface to VPX backplane that mounts in one slot of 6U VPX chassis and the removable NVMe SSD modules. The connectors between the drive module and the carrier are rated for 100,000 mating cycles to support frequent insertions and removals.

The NVMe SSD module can use any COTS NVMe Solid State Drive (SSD) providing capacities up to 32TB (16TB per drive module) and transfer rates of up to 7877 MB/S.

- Capacities up to 32TB (2 x 16TB)
- 7877 MB/S transfer rates
- 100,000 mating cycles
- Removable module with COTS NVMe SSDs
- Two OpenVPX Fat Pipe (FP) PCIe x4 interfaces
- 100,000 mating cycles
- VITA 65 Slot Profiles (SOSA Aligned):
  - SLT6-PAY-4F2Q1H4U1T1S1S1TU2U2T1H-10.6.4-n
    - VPX P2 EP00-EP03
    - VPX P5 EP16-EP19
- VITA 46, 47, 48, 65
- Boot and/or storage disk
- Air cooled
- Military erase options
- FIPS140-2, FIPS197, TCG Opal options
- Option for thumbscrews to remove drive module without tools
- Requires only +12V and +3.3V Aux power
- VxWorks, Linux, and Windows support

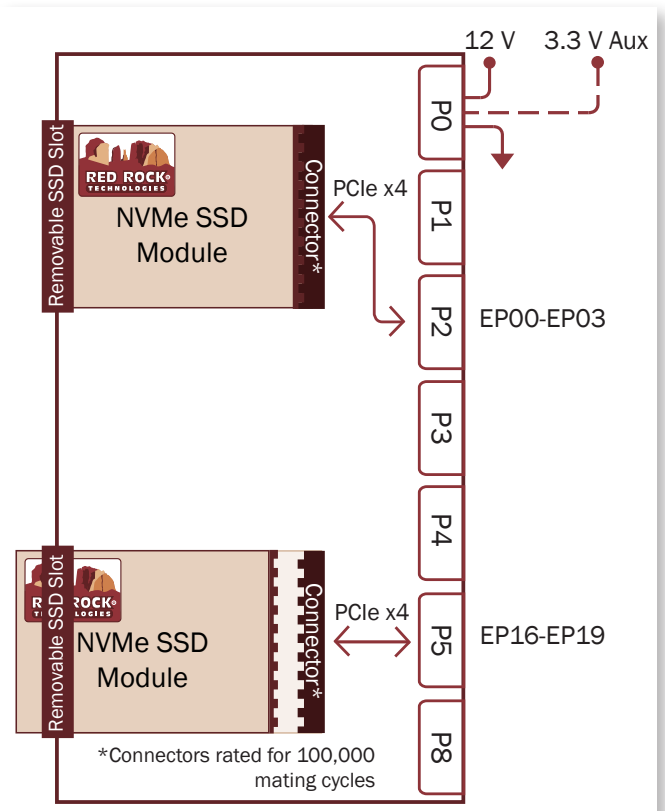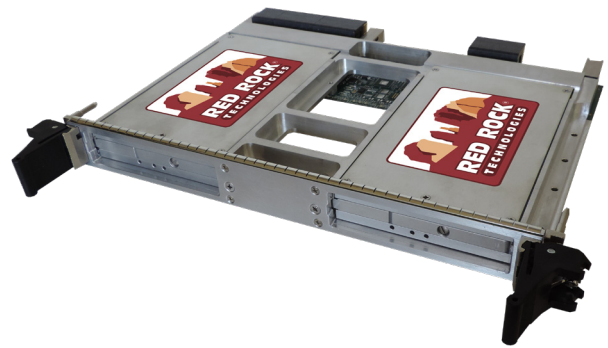

# Ordering Information

## 6U VPX Air Cooled Carrier with PCIe Interface

RRT-6UVPX-NVMe-R-A-P2EP00EP03-P5EP16EP19-UR-X

Options May be left blank

Extended Temperature Range  
X -40°C to 85°C

Conformal Coating  
UR Polyurethane  
AR Acrylic

### ORDER EXAMPLES

RRT-6UVPX-NVMe-R-A-P2EP00EP03-P5EP16EP19-UR-X  
RRT-6UVPX-NVMe-R-A-P2EP00EP03-P5EP16EP19

## Removable NVMe SSD Drive Module

RRT-DM-NVMe-pSLC-4TB-UR-X-FE-TS

### Requirements

NAND Flash Type  
TLC 3D NAND  
MLC Multi Level Cell  
pSLC Pseudo Single Level Cell

Capacity  
500GB - 15.3TB For TLC  
500GB - 8TB For TLC-X  
1TB - 16TB For MLC  
1TB - 8TB For pSLC

Options May be left blank

No Tools  
TS Thumbscrews

Security  
FE Fast Erase  
SE1 NSA/CSS Manual 9-12 Erase  
SE2 RCC-TG IRIG 106-107 Chapter 10 Erase  
OPAL TCG Opal Compliant SSD  
FIPS140-2 FIPS 140-2 Compliant SSD  
FIPS197 FIPS 197 Compliant SSD

Extended Temperature Range  
X -40°C to 85°C

Conformal Coating  
UR Polyurethane  
AR Acrylic

### ORDER EXAMPLES

RRT-DM-NVMe-TLC-15.3TB-TS  
RRT-DM-NVMe-TLC-3840GB-UR-X-SE1  
RRT-DM-NVMe-MLC-16TB-FIPS197  
RRT-DM-NVMe-pSLC-1TB-UR-X-SE1

# Product Specifications

## 6U VPX AIR COOLED CARRIER WITH PCIE INTERFACE AND REMOVABLE NVME SSD MODULE

### PERFORMANCE

NAND FLASH TYPE	TLC	MLC	pSLC	TLC-X
CAPACITIES <sup>1</sup>	Up to 30.6TB	Up to 32TB	Up to 8TB	Up to 16TB
INTERFACE <sup>2</sup>	PCIe Gen 3/4 x 4	PCIe Gen 2 x 4		PCIe Gen 3 x 4
THROUGHPUT - SUSTAINED	3500MB/S (Gen3), 5000MB/S (Gen4)	800 MB/S	1000 MB/S	1500MB/S

### RELIABILITY

MTBF - DRIVE	1 million hours	2 million hours		
MTBF - VPX BOARD <sup>3</sup>	3 million hours			
DATA RETENTION	1 year	5 years	1 year	
ENDURANCE (100GB) TOTAL BYTES WRITTEN	70 TBW	250 TBW	70 TBW	
CARRIER/DRIVE MODULE MATING CYCLES	100,000 mating cycles			

### POWER

VOLTAGE - PAYLOAD SLOT	+12V, +3.3V Aux			
WATTS (IDLE)	7 W	1.5 W		
WATTS (ACTIVE)	20 W	10 W		

### ENVIRONMENTAL

OPERATING TEMP., VITA 47 CLASS <sup>4</sup>	0°C to 55°C, AC1	0°C to 60°C, AC1	See TLC	
EXT. OPERATING TEMP., VITA 47 CLASS <sup>4</sup>	See TLC-X	Not available	-40°C to 85°C, AC3	
STORAGE TEMP.	-40°C to 85°C			
ALTITUDE	10,000 ft. (3,000 meters)	80,000 ft. (24,000 meters)		
RELATIVE HUMIDITY	5% to 95%			
SHOCK, VITA 47 CLASS <sup>5</sup>	20g, 11 millisecond terminal sawtooth pulse, OS1	40g, 11 millisecond terminal sawtooth pulse, OS2		
VIBRATION, VITA 47 CLASS <sup>6</sup>	0.04 g <sup>2</sup> /Hz, 5 Hz to 100 Hz, V1	0.1 g <sup>2</sup> /Hz, 100 Hz to 1000 Hz, V3		

### PHYSICAL

FORM FACTOR	6U VPX
WEIGHT	12.2 oz (346 grams) max for carrier, 6.5 oz (184 grams) max per drive module 25.1 oz (712 grams) max total (carrier + 2 drive modules)
PITCH	1"

### NOTES

- (1) Larger capacities available as new COTS U.2 NVMe drives released
- (2) Interface connected via compatible slot profile SLT6-PAY-4F2Q1H4U1T1S1S1TU2U2T1H-10.6.4-n
- (3) Telcordia SR-332, issue 3, operating temp (40C), electrical stress (50%), environmental factor (1.0)
- (4) Thermal qualification per MIL-STD-810F, Method 501 Procedure II, and MIL-STD-810F, Method 502, Procedure II
- (5) Shock qualification per MIL-STD-810F, Method 516, Procedure I
- (6) Vibration qualification per MIL-STD-810F, Method 514, Procedure I



Red Rock Technologies, Inc. reserves the right to modify, change or discontinue specific products within its product line at its own discretion. Red Rock Technologies, Inc. does not assume any liability resulting from the application or use of its products. The information contained herein has been checked and is believed to be entirely accurate; however, no responsibility is assumed for inaccuracies. "Red Rock Technologies" and the mountain logo are registered trademarks of Red Rock Technologies, Inc.

© Copyright 2022 Red Rock Technologies, Inc.  
All rights reserved. (Rev. 20221228a)