




RRT-PMC-SATA-CONTROLLER


PMC SATA Controller

- PMC PCI/PCI-X 32 /64-bit interface per VITA39 and IEEE 1386-2001 (3.3v PCI interface)
- Transfer rates up to 500 MB/s
- High performance SATA3 transfer rates
- Backwards compatible with SATA1 and SATA2
- 2 Independent SATA interfaces
- Standard 7-pin SATA interface
- LED indication for Power, Reset, and Activity
- Compatible with all SBCs with an PMC slot
- SATA cable secured by rugged retainer clip
- -X version rated for -40°C to 85°C
- Robust design for extreme temperature, shock and vibration environments
- VXWorks, Linux, and Windows driver support
- ROHS compliant

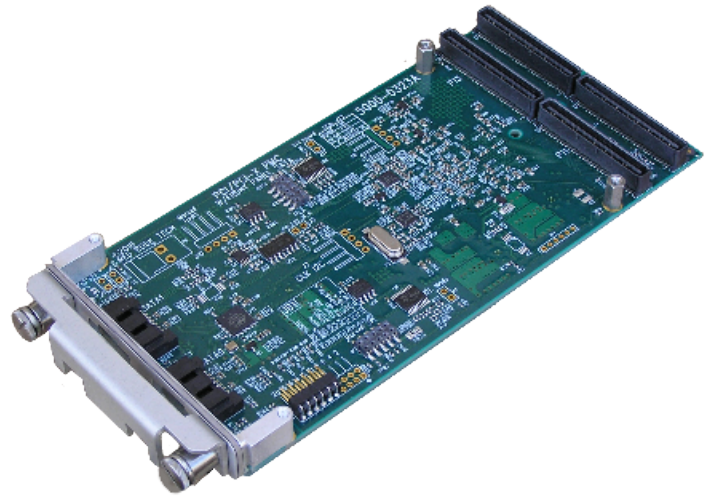

THE PMC SATA CONTROLLER is a PMC Mezzanine card with a dual-channel 64-bit PCI/PCI-X SATA 3 controller with 2 SATA connectors via front panel.

Provides external boot drive and/or disk storage for VPX, VME, cPCI and ATCA single board computers (SBC) with PMC slot.

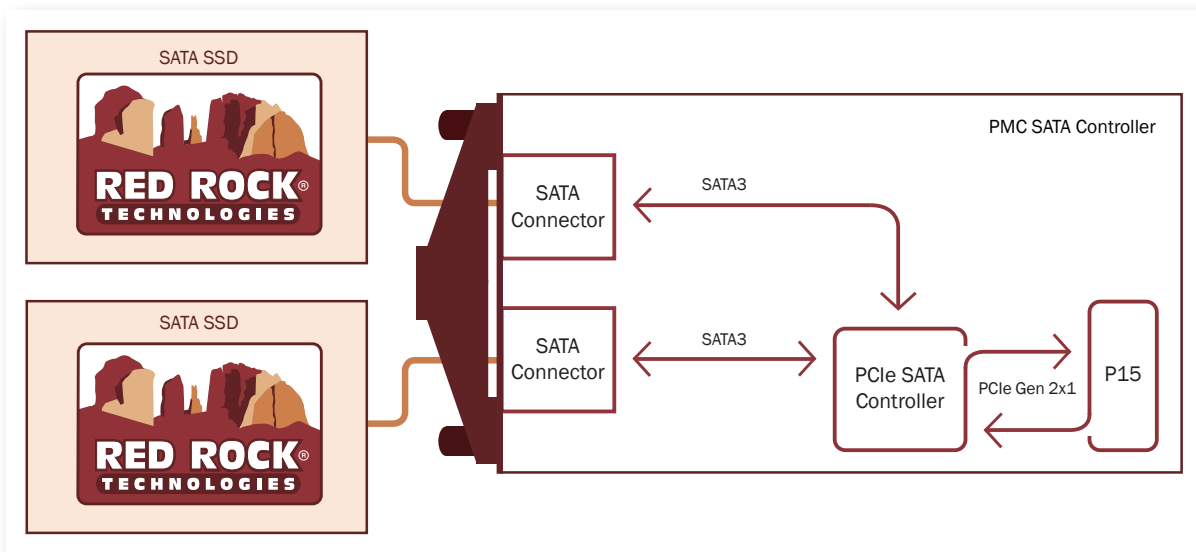

Ordering Information

PMC SATA Controller

RRT-PMC-SATA-CONTROLLER-

UR - X

Options May be left blank

ORDER EXAMPLES

RRT-PMC-SATA-CONTROLLER
RRT-PMC-SATA-CONTROLLER-UR-X

Extended Temperature Range
X -40°C to 85°C

Conformal Coating
UR Polyurethane
AR Acrylic

Product Specifications

PMC PERFORMANCE	
INTERFACE	PCI revision 3, PCI/PCI-X, 3V PCI signaling, 32/64-bit at 25-133 MHz
SPEED	Up to 500 MB/s
SATA PERFORMANCE	
INTERFACE	Supports SATA 1, 2 and 3 operation
SPEED	Up to 500 MB/s
RELIABILITY	
MTBF ¹	3 million hours
POWER	
VOLTAGE	+5V +/- 5%; Voltage 3.3 +/- 0.3V
WATTS (IDLE)	3 W
WATTS (ACTIVE)	4 W max
ENVIRONMENTAL	
OPERATING TEMP., VITA 47 CLASS	0 °C to 70 °C, AC1
EXTENDED OPERATING TEMP., VITA 47 CLASS ²	-40 °C to 85 °C, CC4, AC3
STORAGE TEMP.	-55 °C to 95 °C
ALTITUDE	80,000 ft. (24,000 meters)
RELATIVE HUMIDITY	5% to 95% non-condensing
SHOCK, VITA 47 CLASS ³	40g, 11 millisecond terminal sawtooth pulse
VIBRATION ⁴	0.1g ² /Hz
PHYSICAL	
FORM FACTOR	PMC
WEIGHT	12 oz. max (340g)
NOTES	
(1) Telcordia SR-322, Issue 3, operating temp (40C), electrical stress (50%), environmental factor (1.0).	



Red Rock Technologies, Inc. reserves the right to modify, change or discontinue specific products within its product line at its own discretion. Red Rock Technologies, Inc. does not assume any liability resulting from the application or use of its products. The information contained herein has been checked and is believed to be entirely accurate; however, no responsibility is assumed for inaccuracies. "Red Rock Technologies" and the mountain logo are registered trademarks of Red Rock Technologies, Inc.
© Copyright 2023 Red Rock Technologies, Inc.
All rights reserved. (Rev. 20230113a)