


# XPedite5400

NXP QorIQ P4080 Eight-Core Processor-Based Air-Cooled XMC/PMC Module with Three Gigabit Ethernet Ports

- ▶ NXP QorIQ P4080 processor with eight Power Architecture® e500mc cores at up to 1.5 GHz
- ▶ Alternate NXP QorIQ processors: P3041, P4040, P5010, P5020
- ▶ Air-cooled
- ▶ Up to 8 GB of DDR3-1333 ECC SDRAM
- ▶ Up to 256 MB of NOR flash (with redundancy)
- ▶ Up to 16 GB of NAND flash
- ▶ x4 PCI Express interface to P15
- ▶ XAUI to XMC site
- ▶ PCI PrPMC interface
- ▶ Three Gigabit Ethernet ports
- ▶ Two RS-232/422/485 serial ports
- ▶ Two USB 2.0 ports (one to P14/P16 and one to the front panel or P14/P16)
- ▶ Two SATA ports to XMC site
- ▶ Linux BSP
- ▶ Wind River VxWorks BSP
- ▶ Green Hills INTEGRITY-178 tuMP BSP

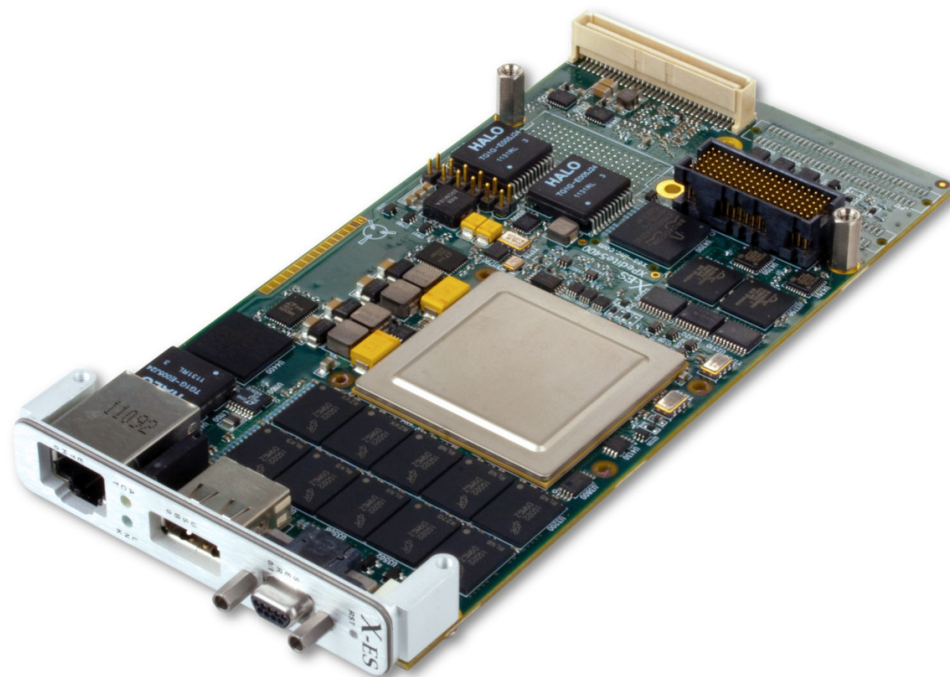

## XPedite5400

The XPedite5400 is a high performance XMC/PrPMC single board computer supporting NXP (formerly Freescale) QorIQ P3, P4, and P5 processors. With a number of processor options to choose from, X-ES can provide a product to meet the specific power and performance requirements of today's embedded computing applications.

The P4080 processor brings the raw power of eight e500mc cores running at up to 1.5 GHz and dual-channel DDR3 memory, delivering unparalleled multi-core performance. For applications which are more power conscious, the P3041 processor offers four e500mc cores running at up to 1.5 GHz with a single channel of DDR3 memory, all within a significantly reduced power envelope. Applications requiring the performance of a true 64-bit processor are satisfied by the P5020 processor which offers dual e5500 cores running at up to 2 GHz and beyond with high performance floating-point units and dual channel DDR3 memory. Additional reduced function processors are available to meet any power and performance budget.

The XPedite5400 provides a high-performance, feature-rich solution for current and future generations of embedded applications. Wind River VxWorks, Linux and Green Hills INTEGRITY-178 tuMP Board Support Packages (BSPs) are available.

# X-ES

Extreme Engineering Solutions

*...Always Fast*

### Extreme Engineering Solutions

3225 Deming Way, Suite 120 • Middleton, WI 53562

Phone: 608.833.1155 • Fax: 608.827.6171

sales@xes-inc.com • <http://www.xes-inc.com>

### Processor

- NXP (formerly Freescale) QorIQ P4080 processor
- Eight Power Architecture® e500mc cores at up to 1.5 GHz
- 128 kB L2 cache per core
- 1 MB L3 cache per channel
- IEEE 754 Floating-Point Unit support

### Alternate Processor Configurations

- P3041 processor with four Power Architecture® e500mc cores at up to 1.5 GHz
- P4040 processor with four Power Architecture® e500mc cores at up to 1.5 GHz
- P5010 processor with one 64-bit Power Architecture® e5500 core at up to 2 GHz
- P5020 processor with two 64-bit Power Architecture® e5500 cores at up to 2 GHz

### Memory

- Up to 8 GB of DDR3-1333 ECC SDRAM
- Up to 256 MB of NOR flash (with redundancy)
- Up to 16 GB of NAND flash

### PrPMC Interface

- 66/33 MHz PCI
- 32-bit bus interface

### P15 XMC Interface

- x4 configurable PCI Express

### P14/P16 XMC/PMC Interface

- Two 10/100/1000BASE-T Ethernet ports
- Two RS-232/422/485 serial ports
- 3.3 V GPIO
- Up to two USB 2.0 ports
- Two SATA ports capable of 3 Gb/s to P16 (optional)
- XAUI port (optional)

### Front Panel I/O

- One Gigabit Ethernet port
- Two RS-232 serial ports
- One USB 2.0 port

### Software Support

- Linux BSP
- Wind River VxWorks BSP
- Green Hills INTEGRITY-178 tuMP BSP

### Physical Characteristics

- Air-cooled XMC/PMC form factor
- Dimensions: 149 mm x 74 mm, 10 mm stacking height

### Environmental Requirements

Contact factory for appropriate board configuration based on environmental requirements.

- Supported ruggedization levels (see chart below): 1, 3
- Conformal coating available as an ordering option

### Power Requirements

- Power will vary based on configuration and usage. Please consult factory.

Ruggedization Level	Level 1	Level 3	Level 5
Cooling Method	Standard Air-Cooled	Rugged Air-Cooled	Conduction-Cooled
Operating Temperature	0 to +55°C ambient (300 LFM)	-40 to +70°C (600 LFM)	-40 to +85°C (board rail surface)
Storage Temperature	-40 to +85°C ambient	-55 to +105°C ambient	-55 to +105°C (maximum)
Vibration	0.002 g <sup>2</sup> /Hz (maximum), 5 to 2000 Hz	0.04 g <sup>2</sup> /Hz (maximum), 5 to 2000 Hz	0.1 g <sup>2</sup> /Hz (maximum), 5 to 2000 Hz
Shock	20 g, 11 ms sawtooth	30 g, 11 ms sawtooth	40 g, 11 ms sawtooth
Humidity	0% to 95% non-condensing	0% to 95% non-condensing	0% to 95% non-condensing

